


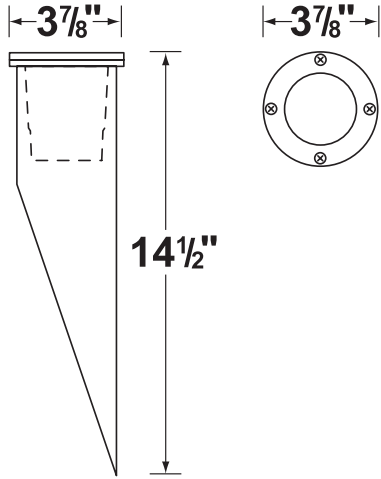



| | | | |
|------------------------------------|--|---|---|
| CL-301 | | |  |
| Product Specification Sheet | | | |
| HOUSING: | Die-cast aluminum fixture, mounted with tension clips inside a PVC sleeve, provides in-ground fixture support. |  <p>CL-301-BK</p> |  <p>CX-854 DIRECT BURIAL WIRENUT AVAILABLE</p> |
| FINISH: | Polyester UV powder coated fixtures, available in BK-Black . PVC sleeve available in black only. (<i>VG color is discontinued</i>) | | |
| LENS: | Clear, tempered, and heat resistant glass with silicone gasket. See accessories & parts for special effect lenses, honeycomb louver and new frosted glass lens CX-380-FR. | | |
| LAMP TYPE: | 12V, MR-16 halogen, 50W max. See lamp guide for LED and color MR-16 lamps. | | |
| MOUNTING: | In-ground direct burial or concrete encasement. Wire connector excluded. |  |  <p>www.coronalighting.com</p> <p>Tel: 800-727-9262 213-747-4500</p> <p>Fax: 800-727-9957 213-747-3234</p> |
| WIRING: | Fixture is prewired with a 3-foot pigtail of direct burial cable. | | |

- Fixture is supplied with 20W MR-16 lamp.
- Remote 12 Volt transformer is required.
- See transformers and accessories for variety of options and choices.
- When ordering, add the 2 letter color code to the end of the product number.