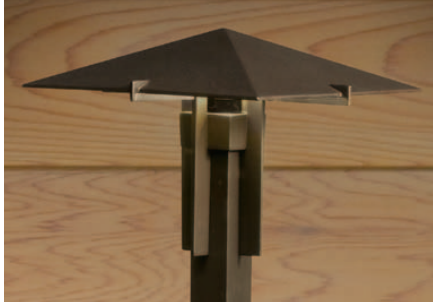


KICHLER®

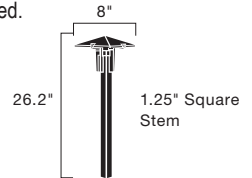
| |
|--------------|
| PROJECT: |
| TYPE: |
| ORDERING # : |
| COMMENTS: |

LED Forged






FEATURES

- A mission style offering in Design Pro LED. A substantial design supported by thick cast construction.
- Cast Aluminum Housing
- 4 W / 5.8 VA Light Output, Integrated LEDs and Driver, 2950K (-150/+175), High CRI
- 9V - 15V AC/DC
- 24" of useable #18-2, SPT-1W leads. Cable connector supplied.
- 8" In-ground stake



ORDERING INFORMATION

EXAMPLE: 15803AZT (Product # & Finish)

| PRODUCT | FINISH | WATTAGE | LIGHT SOURCE | WIRING | MOUNTING ACCESSORIES (INCLUDED) | OPTIONS & ACCESSORIES | | | | | | | | | | | | | | | | | | | | |
|---|--|---|--|--|---------------------------------|--|---------------------|------|------|----|----|----|----|----|----|----|-------------|------|------|------|------|------|------|------|------|------|
| 15803 Dimensions: 8" W x 26.2" L with 1.25" Square Stem | Cast Aluminum AZT - Textured Architectural Bronze™  | 4 W / 5.8 VA Note: Not for use with electronic transformers. | Integrated LEDs and Driver 2950K (-150 / +175) High CRI | 24" of usable #18-2, SPT-1-W leads. Cable connector supplied. | 8" In-ground stake | 15601AZT - Cast Aluminum Surface Mounting Flange w/ Bronze Finish, Neoprene Gasket For Watertight Seal 15601BKT - Cast Aluminum Surface Mounting Flange w/ Black Finish, Neoprene Gasket For Watertight Seal 15601BBR - Cast Brass Surface Mounting Flange, Neoprene Gasket For Watertight Seal  Flange For Tree / Surface Mounting 15607AZT - Textured Bronze Finish 15607BKT - Textured Black Finish 15607BBR - Bronzed Brass Finish  | | | | | | | | | | | | | | | | | | | | |
| Fixture Photometric (fc) | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <table border="1"> <tr> <td>Distance from Light</td> <td>0'</td> <td>1'</td> <td>2'</td> <td>3'</td> <td>4'</td> <td>5'</td> <td>6'</td> <td>7'</td> <td>8'</td> </tr> <tr> <td>Footcandles</td> <td>4.23</td> <td>2.35</td> <td>1.50</td> <td>0.83</td> <td>0.51</td> <td>0.35</td> <td>0.22</td> <td>0.17</td> <td>0.10</td> </tr> </table> | | | | | | | Distance from Light | 0' | 1' | 2' | 3' | 4' | 5' | 6' | 7' | 8' | Footcandles | 4.23 | 2.35 | 1.50 | 0.83 | 0.51 | 0.35 | 0.22 | 0.17 | 0.10 |
| Distance from Light | 0' | 1' | 2' | 3' | 4' | 5' | 6' | 7' | 8' | | | | | | | | | | | | | | | | | |
| Footcandles | 4.23 | 2.35 | 1.50 | 0.83 | 0.51 | 0.35 | 0.22 | 0.17 | 0.10 | | | | | | | | | | | | | | | | | |

NOTES

For Warranty Information, please visit www.landscapelighting.com

We reserve the right to revise the design or components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.

