

SnapTrim-Line: 2" Regressed Downlight

Fire Rated



Canless



Detail Specification:

- 2 Hour Fire Rated
- IP54 Wet Location Rated
- Beam Angle: 38° standard, other options available
- Chip: COB Chip, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Clear COB
- Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- 5-CCT Selectable: 27/30/35/40/50K
- Various sizes, finishes, and trims available
- Standard white round trim included: optional trims available
- Metal housing and trim for better heat dissipation
- Optional emergency backup available: delivers full lumens in EM mode
- SnapTrim Canless: Spring clips with remote j-box eliminates can

Driver Options:

- 120V Triac Dimmable
- Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installation:

- Cut Out Dimension:
- 2": 2-3/4"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- No housing needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101

Series	Beam Angle	Emergency
LED-DLJBX-2-8W-5CCT-FR-WW-SM - 2" 8W 600 Lumens	(Blank) 38° Degree 24D 24° Degree 60D 60° Degree	(Blank) No Emergency Backup EMB Emergency Backup

Optional Accessories (Order Separately)

New Construction Plates	Extension Cables	Emergency Backup ¹ (field install)	Optics
CUNV-NC-ICAT-7H Universal Plate with hanging bars (Round fixtures only)	JBX-EXT-6'-2PIN 6' Extension	LED-EMB-15W -HV-0/10V-2P Up to 14W fixtures	OPTIC-35X17 -24D Field Installable
CUNV-JBX-RI-XL Universal Rough In Plate Extra long (Round fixtures only)	JBX-EXT-10'-2PIN 10' Extension	LED-EMB-25W -HV-0/10V-2P Up to 24W fixtures	OPTIC-35X17 -60D Field Installable
	JBX-EXT-12'-2PIN 12' Extension		OPTIC-63X22 -24D Field Installable
			OPTIC-63X22 -60D Field Installable
			OPTIC-63X22 -60D Field Installable 60 Degree Lens for 4"


1. Field installable. Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice.


FEATURES




DIMENSIONS

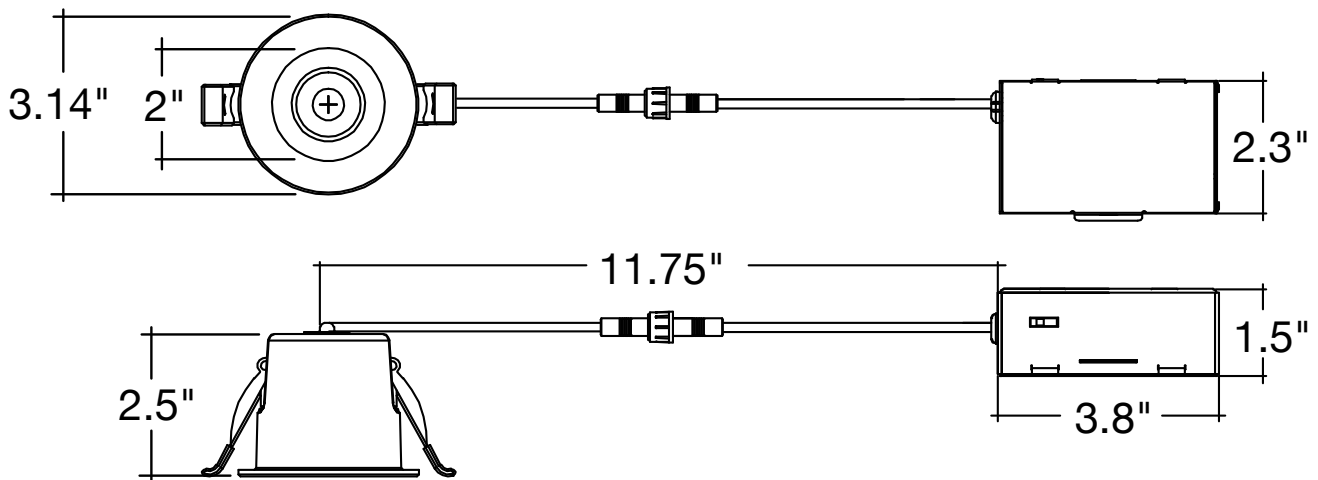

Fixture Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-2-8W-5CCT-FR-WW-SM	120V	8W	600	27/30/35/40/50k	>90

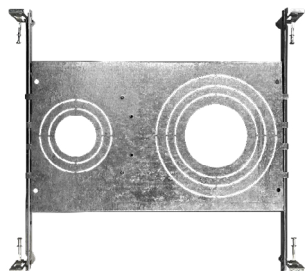

CUNV-NC-ICAT-7H
Universal Pre-Mounting Plate
13 7/8" x 15 1/8"

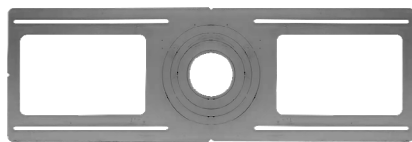

CUNV-JBX-RI-XL
7" x 26"



JBX-EXT
6' / 10' / 12' Extension Cable



OPTIC-35X17-24D
OPTIC-3.5X17-60D
OPTIC-63X22-24D
OPTIC-63X22-60D



LED-EMB-15W-HV-0/10V-2P
LED-EMB-25W-HV-0/10V-2P

CONSTRUCTION PLATES

Accessory	Description
CUNV-NC-ICAT-7H	1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate (Round fixtures only)
CUNV-JBX-RI-XL	Universal tough in plate Extra Long (Round fixtures only)

EXTENSION CABLE

Accessory	Description
JBX-EXT-6'-2PIN	6" Extension Cable
JBX-EXT-10'-2PIN	10" Extension Cable
JBX-EXT-12'-2PIN	12" Extension Cable

EMERGENCY BACKUP

Accessory	Description
LED-EMB-15W-HV-0/10V-2P	Up to 14W fixtures
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures

OPTICS

Accessory	Description
OPTIC-35X17-24D	Field Installable 24 Degree Lens for 2"
OPTIC-35X17-60D	Field Installable 60 Degree Lens for 2"
OPTIC-63X22-24D	Field Installable 24 Degree Lens for 4"
OPTIC-63X22-60D	Field Installable 60 Degree Lens for 4"

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

TRIAC/ELV Dimmers

Lutron	Leviton	Legrand	Cooper
AYCL-153P	NTELV-300P	6633	ADTP703TU 9540
DV-600PR	S-600P	6674	H703PTW DAL06P
DVCL-153P	CT-600P	6602	
MACL-153MH	CTCL-153P	IPL06	
MRF2-6CL	TG-600P		
D-600P	TCCL-153P		