


# SnapTrim-Line: 4" Regressed Downlights

## 5-CCT Selectable



<b>5-CCT</b>	27/30/35/40/50K
<b>3WD</b>	30-18K Warm Dimming

### Detail Specifications:

- Finish: White, Black, Custom
- IP54 Wet Location Rated
- Beam Angle: 38° standard, other options available
- Chip: COB Chip, R9 >50, CRI >90
- 2 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Frosted, non-yellowing
- Average life (L70) of 50,000 hours

### Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

### Product Information:

- 5-CCT Selectable: 27/30/35/40/50K or warm dimming 30 to 18K
- Various sizes, finishes, and trims available
- Standard white round trim included: optional trims available
- Metal housing and trim for better heat dissipation
- Optional emergency backup available: delivers full lumens in EM mode up to 25W
- SnapTrim Canless: Spring clips with remote j-box eliminates can

### Driver Options:

- 120V Triac Dimmable
- 0/10V: 120-277V 0-10V Dimmable
- Built in 2.5Kv Surge Protector
- Flicker Free

### Mounting & Installation:

- Cut Out Dimension: 3-3/4"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- No housing needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

### Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101



Series	3 Beam Angle	Emergency
LED-DLJBX-4RG-15W-5CCT-WH-R	(Blank)	(Blank)
15W • 1,100lm • 120V	38° Degree	No Emergency
LED-DLJBX-4RG-15W-5CCT-WH-R-0/10V	24D	Backup
15W • 1,100lm • 120-277V	24° Degree	EMB
LED-DLJBX-4RG-18W-5CCT-WH-R	60D	Emergency
18W • 1,500lm • 120V	60° Degree	Backup
LED-DLJBX-4RG-12W-3WD-WH-R		
12W • 850lm • 120V		

Optional Accessories (Order Separately)				
Trim Options	New Construction Plates	Emergency Backup Extension Cables	Emergency Backup (field install) 1	Goof Ring Optics
DLJBX-4RG-TRIM-BLK-R	CUNV-NC-ICAT-7H	JBX-EXT-6'-2PIN	LED-EMB-25W-HV	GR-4-WH
Black Round	Universal Plate with	6' Extension	-0/10V-2P	4"-8"
DLJBX-4RG-TRIM-BRZ-R	Hanging Bars	JBX-EXT-10'-2PIN	Up to 24W fixtures	Width
Bronze Round	C4-JBX-RI	10' Extension		
DLJBX-4RG-TRIM-WH-SQ	4" Rough in plate	JBX-EXT-12'-2PIN		
White Square	CUNV-JBX-RI-XL	12' Extension		
DLJBX-4RG-TRIM-BLK-SQ	Universal Rough In			
Black Squared	Plate Extra Long			
DLJBX-4RG-TRIM-BRZ-SQ				
Bronze Square				


1. Field installable. Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice. Optional Accessories please see page 3


**FEATURES**

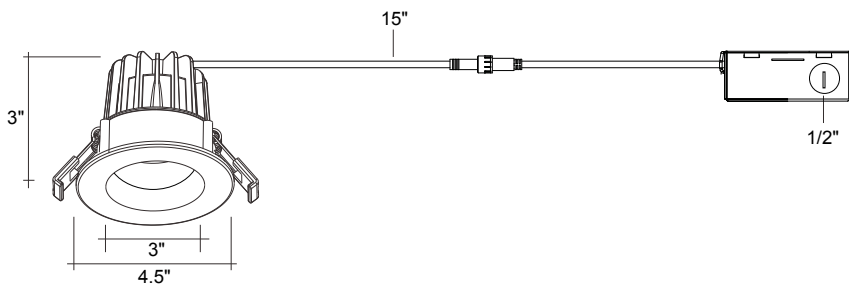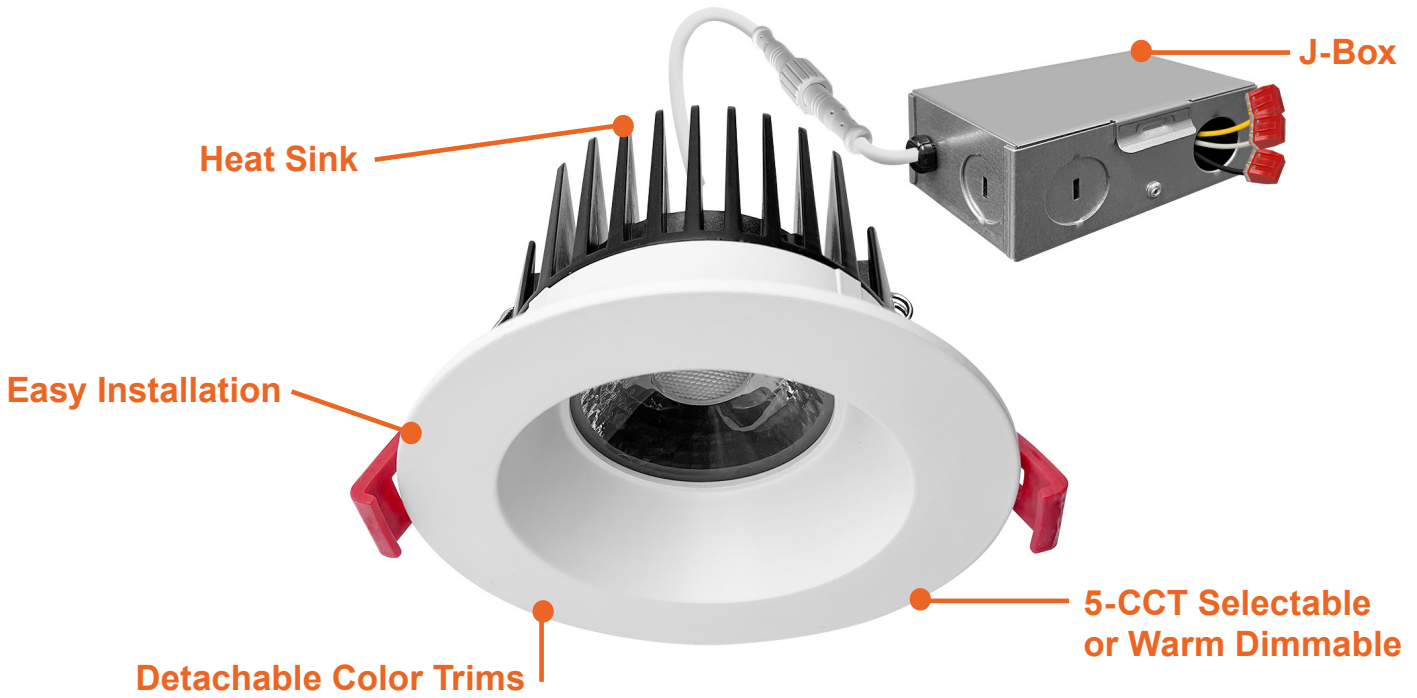


**15W**

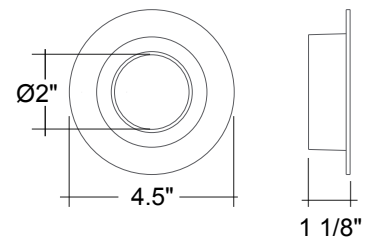

**4" Round Trim**

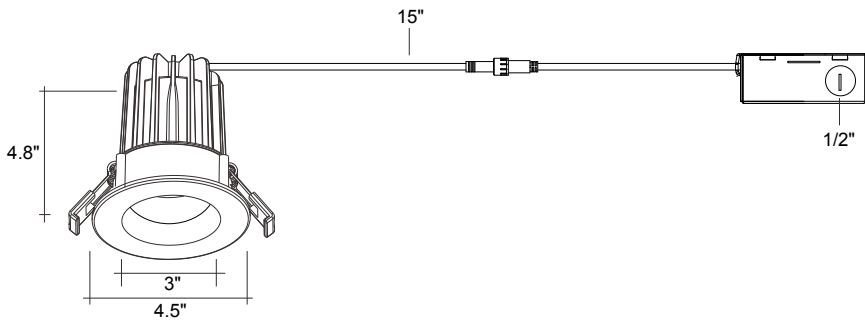

**18W**

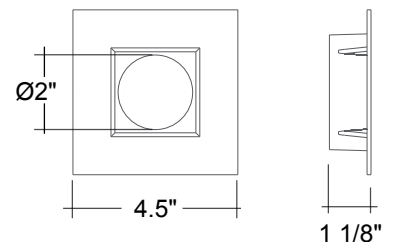

**4" Square Trim**

# SnapTrim-Line: 4" Regressed Downlights

## 5-CCT Selectable

### ACCESSORIES



White (-WH)  
Included



White (-WH-SQ)



Bronze




Bronze (-BRZ-SQ)




Black (-BLK-R)




Black (-BLK-SQ)

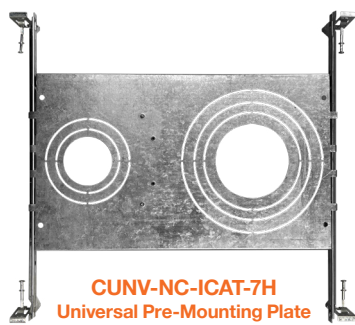

**CUNV-NC-ICAT-7H**  
Universal Pre-Mounting Plate  
13 7/8" x 15 1/8"

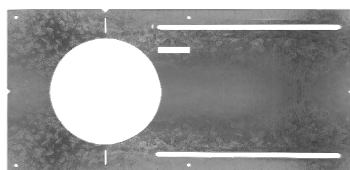

**C4-JBX-RI**  
4" Rough In Plate  
6 1/2" x 17 1/4"

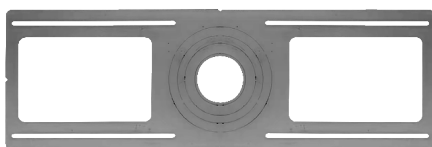


**CUNV-JBX-RI-XL**  
7" x 26"



**JBX-EXT**  
6' / 10' / 12' Extension Cable



**LED-EMB-25W-HV-0/10V-2P**



**GR-6-WH**



**OPTIC-63X22-24D**  
**OPTIC-63X22-60D**

Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-4RG-18W-5CCT-WH-R	120V	18w	1500	27/30/35/40/50K	>90
LED-DLJBX-4RG-15W-5CCT-WH-R	120V	15w	1000	27/30/35/40/50K	>90
LED-DLJBX-4RG-15W-5CCT-WH-R-0/10V	120-277V	15w	1100	27/30/35/40/50K	>90
LED-DLJBX-4RG-12W-3WD-WH-R	120V	12w	850	30—>18k	>90

### TRIMS

Accessory	Description
Add '-EMB-' to model #	Emergency Backup (External 25W)
DLJBX-4RG-TRIM-WH-SQ	4" Regressed Gimbal White Square Trim
DLJBX-4RG-TRIM-BLK-R	4" Regressed Gimbal Black Round Trim
DLJBX-4RG-TRIM-BLK-SQ	4" Regressed Gimbal Black Square Trim
DLJBX-4RG-TRIM-BRZ-R	4" Regressed Gimbal Bronze Round Trim
DLJBX-4RG-TRIM-BRZ-SQ	4" Regressed Gimbal Bronze Square Trim

### CONSTRUCTION PLATES

Accessory	Description
CUNV-NC-ICAT-7H	1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate
C4-JBX-RI	4" Rough In Plate
CUNV-JBX-RI-XL	Universal tough in plate (Extra Long)

### EXTENSION CABLE

Accessory	Description
JBX-EXT-6'-2PIN	6" Extension Cable
JBX-EXT-10'-2PIN	10" Extension Cable
JBX-EXT-12'-2PIN	12" Extension Cable

### BATTERY BACK-UP

Accessory	Description
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures

### OPTICS

Accessory	Description
OPTIC-63X22-24D	24 Degree
OPTIC-63X22-60D	60 Degree

### GOOF RING

Accessory	Description
GR-6-WH	6.3-10" Width

### TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

#### TRIAC/ELV Dimmers

Lutron	Leviton	Legrand	Cooper
AYCL-153P	NTELV-300P	6633	ADTP703TU 9540
DV-600PR	S-600P	6674	H703PTW DAL06P
DVCL-153P	CT-600P	6602	
MACL-153MH	CTCL-153P	IPL06	
MRF2-6CL	TG-600P		
D-600P	TCCL-153P		

#### 0-10V Dimmers

Lutron	Leviton	Wattstopper	Lightolier
DVTV	Illumitech - IP7	DCLV1	ZP600FAM120
NFTV			SR1200ZTUNV
NTFTV			