

Canless Downlights

4" Adjustable Downlight: SnapTrim-Line
Canless Series



Detail Specifications:

- Finish: White, Black, Brushed Nickel
- IP54 Wet Location Rated
- Beam Angle: 38° standard, other options available
- Chip: COB Chip, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Clear, non-yellowing
- Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- 5-CCT Selectable: 27/30/35/40/50K or warm dimming 30 to 18K
- Metal housing and trim for better heat dissipation
- Optional emergency backup available: delivers full lumens in EM mode up to 25W
- SnapTrim Canless: Spring clips with remote j-box eliminates can

Driver Options:

- 120V Triac Dimmable
- Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installation:

- Cut Out Dimension: 4-1/4"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- No housing needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

Certifications:

- ETL Listed for USA and CA
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101

| | |
|--------------|---------------------|
| 5-CCT | 27/30/35/40/50K |
| 3WD | 30-18K Warm Dimming |

| Series | Beam Angle | Emergency |
|--|-----------------------|--------------------------------|
| LED-DLJBX-ADJ-4-12W-5CCT-WH-R 12W • 750LM • White Round Trim | (Blank) 38° Degree | (Blank) No Emergency Backup |
| LED-DLJBX-ADJ-4-12W-5CCT-BLK-R 12W • 750LM • Black Round Trim | 24D 24° Degree | EMB Emergency Backup |
| LED-DLJBX-ADJ-4-18W-5CCT-WH-R 18W • 1,500LM • White Round Trim | 60D 60° Degree | |
| LED-DLJBX-ADJ-4-18W-5CCT-BLK-R 18W • 1,500LM • Black Round Trim | | |
| LED-DLJBX-ADJ-4-12W-5CCT-BN-R 12W • 750LM • Brushed Nickel Round Trim | | |
| LED-DLJBX-ADJ-4-12W-3WD-WH-R 12W • 750LM • White Round Trim | | |

Optional Accessories (Order Separately)

| New Construction Plates | Extension Cables | Emergency Backup 1 (field install) | Optics |
|--|--|--|--|
| CUNV-NC-ICAT-7H Universal Plate with Hanging Bars | JBX-EXT-6'-2PIN 6' Extension | LED-EMB-25W-HV -0/10V-2P Up to 24W fixtures | OPTIC-75X24-24D 24 Degree Field Install Lens |
| CUNV-JBX-RI-XL Universal Rough In Plate Extra Long | JBX-EXT-10'-2PIN 10' Extension | JBX-EXT-12'-2PIN 12' Extension | OPTIC-75X24-60D 60 Degree Field Install Lens |





1. Field installable. Lasts 90 minutes

Specs and model numbers are subject to change with or without notice.

FEATURES




DIMENSIONS

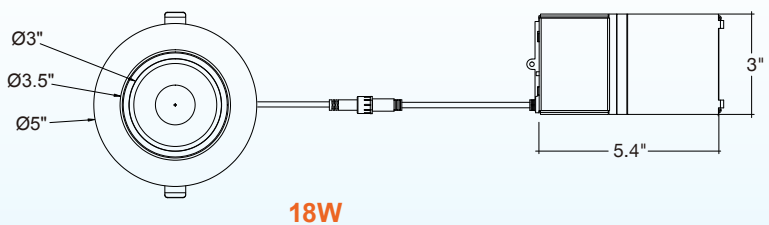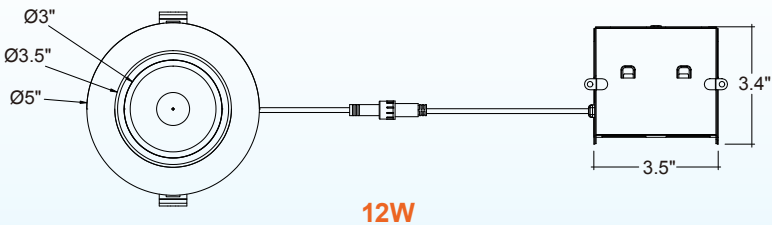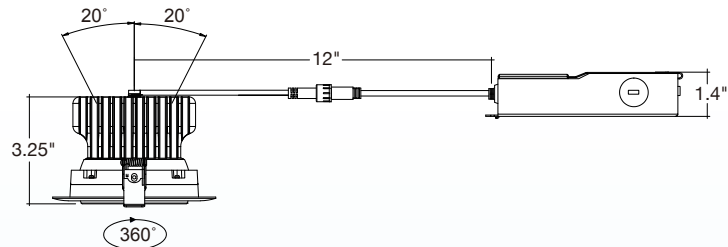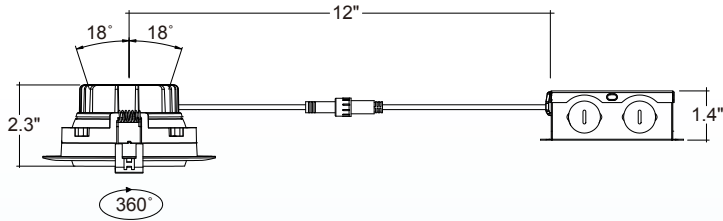


Specs and model numbers are subject to change with or without notice.

4" Adjustable Downlight: SnapTrim-Line Canless Series

ACCESSORIES

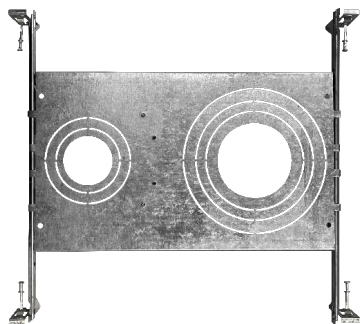


CUNV-NC-ICAT-7H
Universal Pre-Mounting Plate
13 7/8" x 15 1/8"

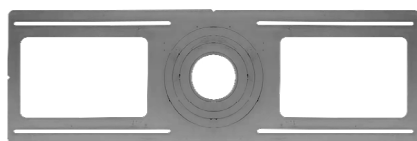

CUNV-JBX-RI-XL
7" x 26"



JBX-EXT
6' / 10' / 12' Extension Cable

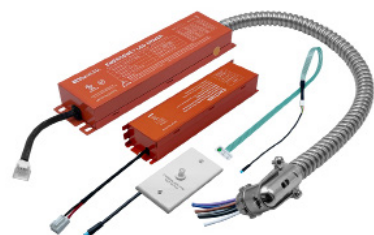

LED-EMB-25W-HV-0/10V-2P



OPTIC-75X24-24D
OPTIC-75X24-60D

| Model | Voltage | Watts | Lumens | Color | CRI |
|--------------------------------|---------|-------|--------|-----------------|-----|
| LED-DLJBX-ADJ-4-12W-5CCT-WH-R | 120V | 12w | 750 | 27/30/35/40/50K | >90 |
| LED-DLJBX-ADJ-4-12W-5CCT-BLK-R | 120V | 12w | 750 | 27/30/35/40/50K | >90 |
| LED-DLJBX-ADJ-4-12W-5CCT-BN-R | 120V | 12w | 750 | 27/30/35/40/50K | >90 |
| LED-DLJBX-ADJ-4-12W-3WD-WH-R | 120V | 12w | 750 | 30-->18k | >90 |
| LED-DLJBX-ADJ-4-18W-5CCT-BLK-R | 120V | 18w | 1,500 | 27/30/35/40/50K | >90 |
| LED-DLJBX-ADJ-4-18W-5CCT-WH-R | 120V | 18w | 1,500 | 27/30/35/40/50K | >90 |

CONSTRUCTION PLATES

| Accessory | Description |
|-----------------|---|
| CUNV-NC-ICAT-7H | 1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate |
| CUNV-JBX-RI-XL | Universal tough in plate (Extra Long) |

EXTENSION CABLE

| Accessory | Description |
|------------------|---------------------|
| JBX-EXT-6'-2PIN | 6" Extension Cable |
| JBX-EXT-10'-2PIN | 10" Extension Cable |
| JBX-EXT-12'-2PIN | 12" Extension Cable |

EMERGENCY BACKUP

| Accessory | Description |
|-------------------------|--------------------|
| LED-EMB-25W-HV-0/10V-2P | Up to 24W fixtures |

OPTICS

| Accessory | Description |
|-----------------|------------------------------|
| OPTIC-75X24-24D | 24 Degree Field Install Lens |
| OPTIC-75X24-60D | 60 Degree Field Install Lens |

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

TRIAC/ELV Dimmers

| Lutron | Leviton | Legrand | Cooper |
|------------|---------|-----------|--------|
| AYCL-153P | 6633 | ADTP703TU | 9540 |
| DV-600PR | 6674 | H703PTW | DAL06P |
| DVCL-153P | 6602 | | |
| MACL-153MH | IPL06 | | |
| MRF2-6CL | | | |
| D-600P | | | |
| NTELV-300P | | | |
| S-600P | | | |
| CT-600P | | | |
| CTCL-153P | | | |
| TG-600P | | | |
| TCCL-153P | | | |
| L-153P | | | |

Specs and model numbers are subject to change with or without notice.