

# NUTPCOB-RGBW

## 24V RGBW COB LED Tape Light

Source: 5.5W/ft. LED  
300lm/ft.

Type

Project

Catalog No.

Notes

### PRODUCT DESCRIPTION

24V RGBW COB LED Tape has alternating LED diodes that are RGBW and White. Users can create any color in the rainbow using a compatible RGBW controller or DMX decoder. COB LED creates an uniform seamless line of light, without the need for additional diffused covers or accessories. Both color settings are programmable and have adjustable brightness and action features that are controlled with the press of a button. This flexible COB LED light source produces up to 300 lumens per foot, a perfect solution for low clearance or reflective surfaces to eliminate all glare or dotting.

### FEATURES

- Cuttable every 1.31" and connectable with accessories
- 24V system - requires Class 2 LED driver and RGBW controller
- Seamless COB eliminates LED dotting
- Up to 300 lumens at 5.5W per foot
- Primary Colors: Red, Green, Blue and White (3000K)
- Easy installation with 3M™ adhesive pre-installed
- cULus listed for indoor dry locations (IP20 rated)

### SPECIFICATION

**Construction:** Uncoated LED tape can be cut every 1.31" at marked intervals. Cutting does not effect circuit and can be connected to accessories. Each roll includes (1) 12" power cord, (32) clear mounting clips and screws.

**Mounting:** Tape light includes pre-installed 3M™ adhesive tape for simple installation. Optional channels or clips are available.

**NATLCB-509:** Clear Mounting Clips (pack of 15)

**NATL-C23:** 4' Shallow Recessed Channel

**NATL-C24:** 4' Shallow Channel

**NATL-C25:** 4' Deep Recessed Channel

**NATL-C26:** 4' Deep Channel

**NATL-C27:** 4' J-Style Channel

### ELECTRICAL

**Input Voltage:** 24VDC

**Lumens / Wattage:** 300lm / 5.5W per foot

**Color Rendering Index:** 90+ CRI

**Beam Spread:** 150° Wide Flood

**Operating Temperature:** -20°C to 45°C

**Dimming:** Dimmable with RGBW controller or DMX decoder

**Maximum Length:** 16.4' max.

**Controller:** Each run requires a controller or DMX decoder, which can be linked together for color synchronization. The controller can be controlled locally or with an optional hand held remote. DMX decoder requires a DMX controller (by others).

### ACCESSORIES

**NATLCB-508:** 12" Hardwire Power Cable

**NATLCB-507:** End to End Connector

**NATLCB-503:** 3" Linking Cable

**NATLCB-506:** 6" Linking Cable

**NATLCB-518:** 18" Linking Cable

**NATLCB-536:** 36" Linking Cable

**NATLCB-572:** 72" Linking Cable

### LABELS AND LISTINGS

- cULus Listed for Dry Locations
- IP20 rated
- RoHS compliant
- 5-Year Limited Warranty



## 24V RGBW COB LED Tape Light

Length / Color Temperature

**NUTPCOB-RGBW24CV16** = 16.4' Roll / RGBW

### PRODUCT IMAGES & DIMENSIONS



**Field Cuttable**  
Spaced 1.31" at  
marked intervals

**Small Size**  
Only 0.47" width

**RGBW Color Changing**  
Red, Green, Blue and White (3000K)



### Optional Accessories

Description

**NATLCB-503** = 3" Linking Cable

**NATLCB-506** = 6" Linking Cable

**NATLCB-518** = 18" Linking Cable

**NATLCB-536** = 36" Linking Cable

**NATLCB-572** = 72" Linking Cable

**NATLCB-507** = End to End Connector

**NATLCB-508** = 12" Hardwire Power Cable

**NATLCB-509** = Mounting Clips (pack of 15)

Example: **NUTPCOB-RGBW24CV16** = 16.4' 24V RGBW COB LED Tape Light

# NUTPCOB-RGBW

24V RGBW COB LED Tape Light Accessories

Type
Project
Catalog No.
Notes



RGBW RF Controller

**NARGBW-975**

12-24VDC 15A max. A controller is required for each RGBW LED Tape Light run. Installs between the driver and the power line interconnector. The controller can be used to toggle between colors or changing modes.



RGBW Hand Held Remote

**NARGBW-977**

Used to program RGBW tape light to certain color configurations. Can be used up to control up to four NARGBW-975 controllers  
**Key Selections:** Brightness, Colors, Color Changing - Flash, Strobe, Fade and Smooth Fade, On/Off



DMX Decoder

**NATL-DMX-4C/RGBW**

20A Max. A DMX decoder or RGBW controller is required for each RGBW LED Tape Light run. Installs between the driver and the power line interconnector. The decoder requires a DMX controller (by others) to operate.



12" Power Cord

**NATLCB-508**

12" Cable used to hardwire tape light to a compatible RGBW controller or DMX decoder.



End to End Connector

**NATLCB-507**


Connects two tape light sections together.



Linking Cables

- NATLCB-503** 3" Cable
- NATLCB-506** 6" Cable
- NATLCB-518** 18" Cable
- NATLCB-536** 36" Cable
- NATLCB-572** 72" Cable

Linking cable is used to connect two tape light sections together.




4' Shallow Recessed Channel

**NATL-C23A** Aluminum Finish  
 Used to mount tape light recessed in a surface. 4' length and field cuttable. Diffused lens and end caps are included.




4' Shallow Channel

**NATL-C24A** Aluminum Finish  
**NATL-C24B** Black Finish  
**NATL-C24W** White Finish  
 Used to mount tape light to flat surface. 4' length and field cuttable. Diffused lens and end caps are included.




4' Deep Recessed Channel

**NATL-C25A** Aluminum Finish  
 Used to mount tape light recessed in a surface. 4' length and field cuttable. Diffused lens and end caps are included.




4' Deep Channel

**NATL-C26A** Aluminum Finish  
**NATL-C26W** White Finish  
 Used to mount tape light to flat surface. 4' length and field cuttable. Diffused lens and end caps are included.



4' J-Style Channel

**NATL-C27A** Aluminum Finish  
 Used to mount tape light to flat surface. 4' length and field cuttable.

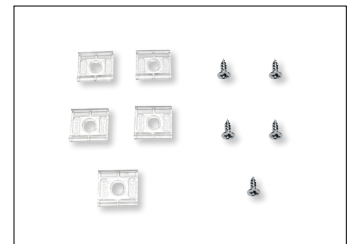

Clear Mounting Clips

**NATLCB-509** Pack of 15  
 Pack of 15 clear mounting clips and screws to mount tape light to flat surface.

# NUTPCOB-RGBW

## 24V RGBW COB LED Tape Light Drivers & Accessories

Type

Project

Catalog No.


Notes



Direct Plug-In LED Driver

**NATL-524W** 24V 24W  
**NATL-545W** 24V 45W

Input Voltage: 120V  
Cable Length: 6'



Direct Plug-In LED Driver

**NATL-596W** 24V 96W

Input Voltage: 120V  
Input Wire: 44" Cord and Plug  
Output Wire: 58" Power line connector



Class II Hardwire LED Driver

**NATL-5100HW** 24V 81.6W

Input Voltage: 120-240V  
Dimming: Non-Dimmable  
Includes: 10' Power Line Connector



Class II Universal Dimming Driver

**NPSU-60W/24** 60W  
**NPSU-96W/24** 96W  
**NPSU-3X96W/24** 3x 96W

Input Voltage: 110-277V  
Dimming: Non-Dimmable  
Note: Power Line Connector(s) not included



Class II Hardwire LED Driver  
ELV Dimming

**NATLED-5040HW** 24V 40W  
**NATLED-5075HW** 24V 75W

Input Voltage: 120V  
Dimming: Non-Dimmable  
Includes: 10' Power Line Connector



Class II Hardwire LED Driver  
MLV Dimming

**NMT-48/24C2D1** 48W

Input Voltage: 120V  
Dimming: Non-Dimmable  
Includes: 10' Power Line Connector



Class II Hardwire LED Driver  
with Breakers, MLV Dimming

**NMT-303/24C2D1** 120V input  
**NMT-303/24C2D2** 277V input

Input Voltage: 120V or 277V  
Dimming: Non-Dimmable  
Breakers: (3) 100W  
Note: Power Line Connector(s) not included



Class II Hardwire LED Driver  
with Regulator, MLV Dimming

**NMTD-60/24D** 24V 60W  
**NMTD-96/24D** 24V 96W

Input Voltage: 120-277V  
Dimming: Non-Dimmable  
Regulator: Integral regulator for constant current and voltage  
Includes: 10' Power Line Connector



Power Line Connector

**NALTL-10** 10' Power Line  
**NALTL-30** 30' Power Line

For use with Class II drivers. Carries output from driver, requires power line interconnectors.

**NATL-302W** 5" Splitter

Splits power line connector into two separate leads, requires power line cable.



Low Voltage Splice Box

**NATL-415W**

Use to join low voltage lead to power line connector.



Terminal Block

**NATL-407** 4-Way

2-3/8"L x 1-1/8"W x 1/8"D

**NATL-408** 8-Way

4"L x 1-1/8"W x 1/8"D



Wire Clip, Plastic - 10pk

**NATL-404W**

J-Clip

**NATL-405W**

Over the Wire

**NATL-406W**

Square Clip



2' Wire Raceway

**NATL-422B**

Black

**NATL-422W**

White

Field-cuttable plastic. Includes wire channel with double faced tape and cover.