


# C-Line: Eco Linear Fixtures

## 5-CCT & 3-Power Selectable

Strips

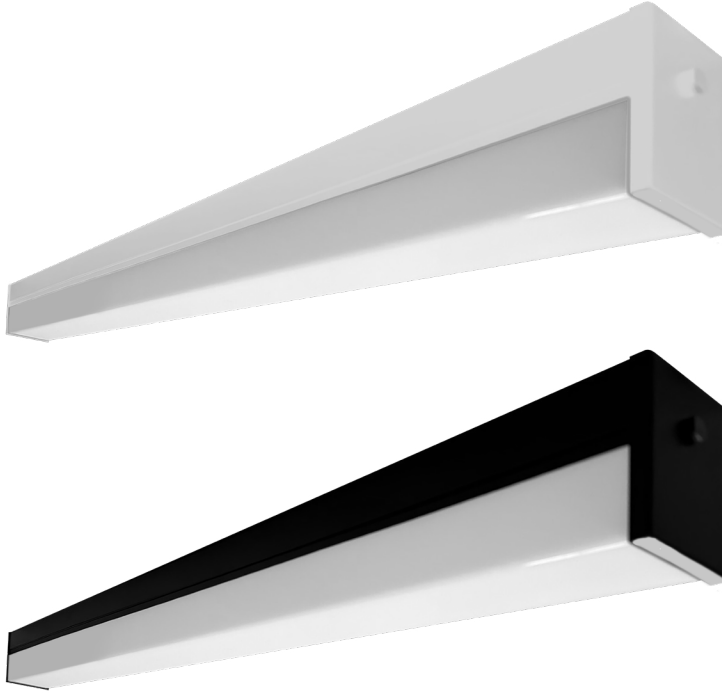

### Detail Specification:

- Finish: White or Black, custom available
- IP Rating: Damp Location
- Beam Angle: 100°
- Chip: SMD 2835, R9 >50, CRI >90
- Operating Temperature: -4° - 122° F
- Lens: Acrylic Frosted Lens Standard: efficiently emits the light through a high-quality acrylic lens, spreading it evenly and without causing glare
- Average life (L70) of 50,000 hours

### Applications:

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Retail
- Commercial and Industrial

### Product Information:

- Construction: aluminum housing with frosted lens
- Finished with corrosion free powder coat
- 6' cable and suspension kit included
- Select-n-Switch Technology: 5-CCT + 3-Power Selectable

### Driver Options:

- Max Run: 600W off one power feed
- UNV: 100-277V, 0-10V Dimmable
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- 3-Power Selectable
- Flicker Free

### Mounting & Installation

- 5-wire 6' power cord is included. 6-wire power cord is included with emergency models
- 6' Canopy suspension kit (1 power feed) included

### Certifications

- UL Listed for USA and CA
- DLC Premium Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

LUMENS/FT		LUMENS/WATTAGE	
POWER SETTING	DOWNLIGHT	WATTAGE	DOWNLIGHT
Lowest	975	30W	3,900
Middle	1,300	40W	5,200
Highest	1,625	50W	6,500

LUMEN BASES OFF 4000K. Other CCT: +/- 5%

Series  
**LED-ELIN - 4FT-3P50 - 5CCT -**  
Eco Linear    50/40/30W    50/40/35  
30/27K

Finish <sup>2</sup>    Emergency  
**WH**    **(blank)**  
White    White  
**BL**    **EMB**  
Black    Emergency  
Backup

1. BMS: Microwave Sensor: Areas made of full metal and high vibration settings may trigger false motion.

2. Standard quick ship finish is white. Other colors are custom finishes.


### Accessories (Order Separately)

#### Suspension Canopy Kits


**SK-CPR-12FT-1WR-WH**  
20' Single Wire White Finish  
**SK-CPR-12FT-1WR-BL**  
20' Single Wire Black Finish

Specs and model numbers are subject to change with or without notice.

**FEATURES**

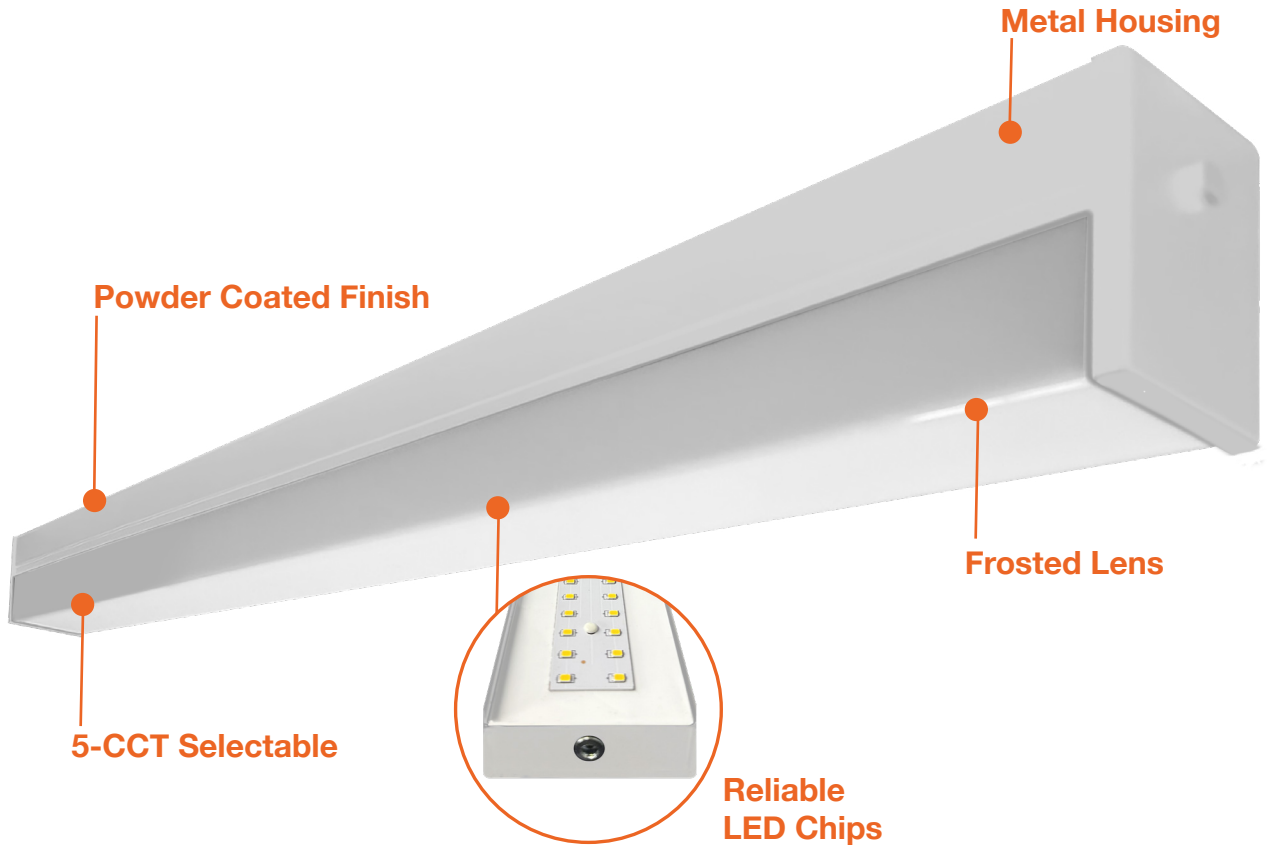

**DIMENSIONS**

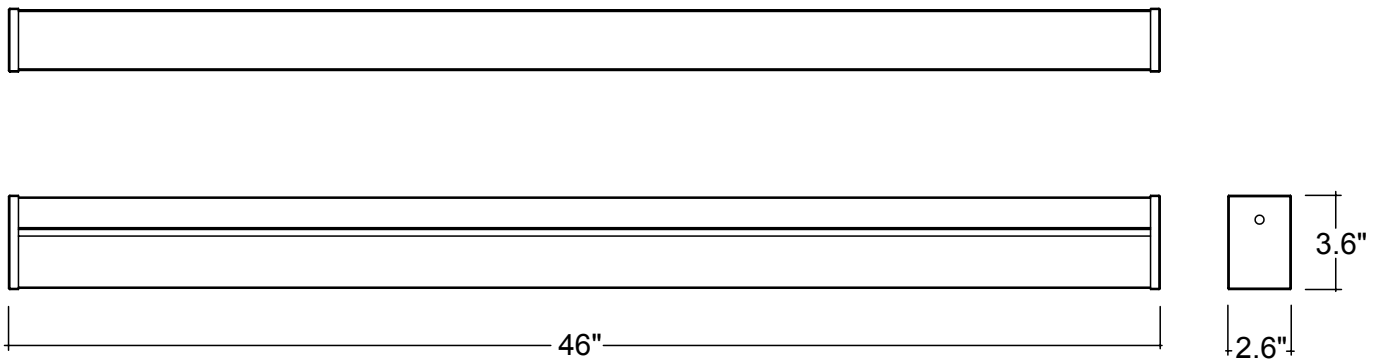

*Specs and model numbers are subject to change with or without notice.*

# C-Line: Eco Linear Fixtures

## 5-CCT & 3-Power Selectable

### ACCESSORIES



**SK-CPR-12FT-1WR-WH**  
**SK-CPR-12FT-1WR-BL**

Model	Voltage	Watts	Lumens	Color	CRI
LED-ELIN-4FT-3P50-5CCT-WH	120-277V	50/40/30w	6,500/5,200/3,900	50/40/35/30/27k	>90
LED-ELIN-4FT-3P50-5CCT-BL	120-277V	50/40/30w	6,500/5,200/3,900	50/40/35/30/27k	>90

### SUSPENSION

Accessory Model	Description
SK-CPR-12FT-1WR-WH	20' Single Wire White Finish
SK-CPR-12FT-1WR-BL	20' Single Wire Black Finish

*Specs and model numbers are subject to change with or without notice.*