



ARCY-Line: Tubular Linear Fixtures

4-CCT Selectable



Detail Specifications:

- Finish: White, custom available
- IP Rating: Damp Location
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -4° - 122° F
- Lens: Acrylic Frosted Lens Standard: efficiently emits the light through a high-quality acrylic lens, spreading it evenly and without causing glare
- Average life (L70) of 50,000 hours

Applications:

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Retail
- Commercial and Industrial

Product Information:

- Construction: aluminum housing with frosted lens
- L-Corner connector available (Does not emit light)
- Finished with corrosion free powder coating
- 6' power cord included on each fixture
- Select-n-Switch Technology: 4-CCT Selectable

Driver Options:

- Max Run: 600W off one power feed
- UNV: 100-277V, 0-10V Dimmable
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- 3-Power Selectable
- Flicker Free

Mounting & Installation:

- 5-wire 6' power cord is included. 6-wire power cord is included with emergency models
- 6' Canopy suspension kit (1 power feed) must be purchased separately

Certifications:

- UL Listed for USA and CA
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017



Series	Length & Watt	Light Direction	CCT	Finish ¹	Emergency
LED-TBL	2FT-20W	D	4CCT	WH	Blank
Tubular	20W	Downlight	30/35	White	None
Architectural	2,300LM	Only	40/50K	BL ¹	EMB
Linear	4FT-40W	UD		Black	Emergency
	40W	Up		SLV ¹	Backup
	4,600LM	& Downlight		Silver	
	8FT-80W			Custom ¹	
	80W			View our available	
	9,200LM			custom colors	


1. Standard quick ship finish is white. Other colors are custom finishes.

Optional Accessories (Order Separately)




Round Trim Options	Round Trim Options
SK-6FT-I-CP-TH	TBL-L
6' Single Wire	L-Shape
White Finish	Connector

Specs and model numbers are subject to change with or without notice. Customization of product is available.

FEATURES

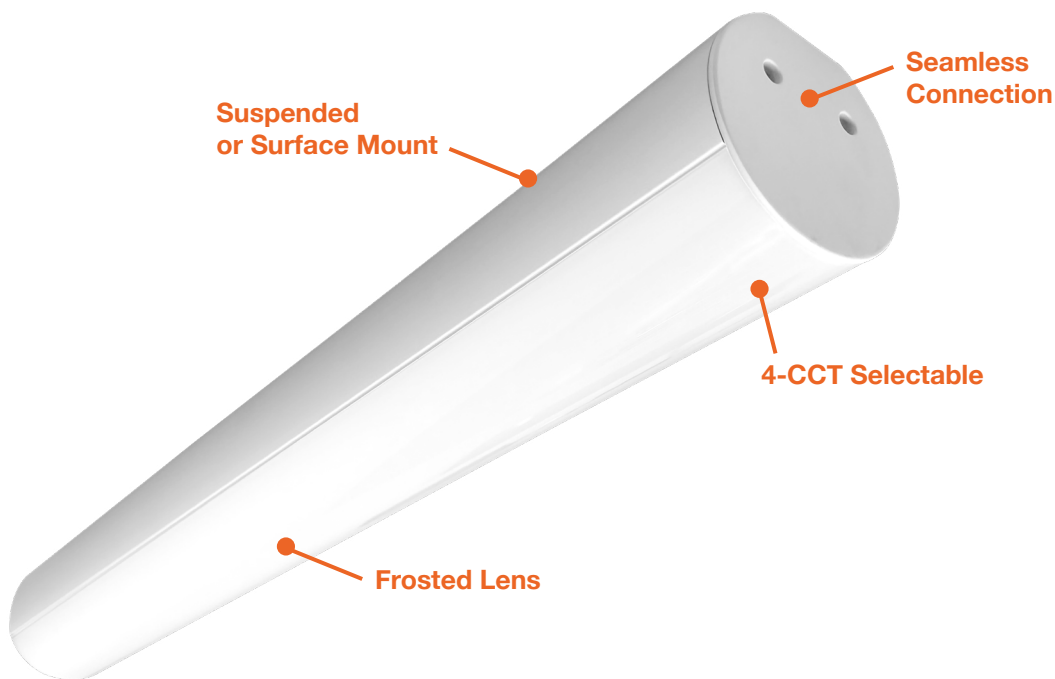

DIMENSIONS

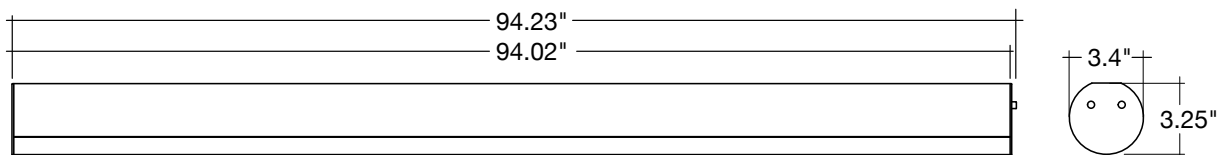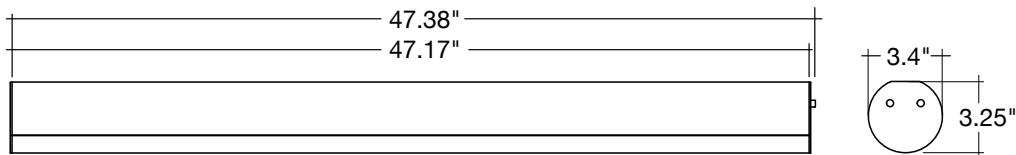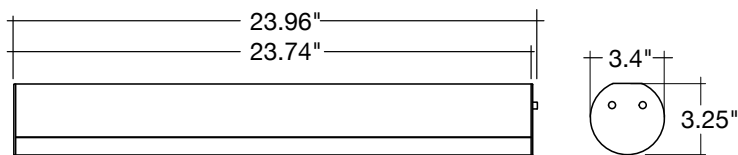

Specs and model numbers are subject to change with or without notice. Customization of product is available.

Suspended or Surface Mounted Linear
Models: Downlight Only

Model	Voltage	Watts	Lumens	Color
LED-TBL-2FT-20W-D-4CCT-WH	120-277V	20w	2,300	50/40/35/30k
LED-TBL-4FT-40W-D-4CCT-WH	120-277V	40w	4,600	50/40/35/30k
LED-TBL-8FT-80W-D-4CCT-WH	120-277V	80w	9,200	50/40/35/30k

Suspended Linear Models: 80% Downlight & 20% Uplight

Model	Voltage	Watts	Lumens	Color
LED-TBL-2FT-20W-UD-4CCT-WH	120-277V	20w	2,300	50/40/35/30k
LED-TBL-4FT-40W-UD-4CCT-WH	120-277V	40w	4,600	50/40/35/30k
LED-TBL-8FT-80W-UD-4CCT-WH	120-277V	80w	9,200	50/40/35/30k

ACCESSORIES

Model	Description
SK-6FT-I-CP-TH	6" Suspension Kit for ATL
TBL-L	L-Shape Connector

L CORNER PATTERNS

