

# OMNI SLIM 3CCT SERIES

## 24V DC Puck Light

3CCT Omni Slim Puck is as versatile as it is sleek. Adjustable between 2700K, 3000K, 4000K as well as a black or white finish options (both included with each puck). Use in any accent, under-cabinet, in-cabinet, task, or any application. Especially when space is a concern.

- Adjustable CCT: 2700K - 3000K - 4000K
- High color rendering index (90+ CRI)
- 24V DC operation
- Low power consumption of 4W
- Surface mount or recessed mount application
- cETLus listed for dry locations
- 35,000 hour rated life



PROJECT: \_\_\_\_\_

TYPE: \_\_\_\_\_

LOCATION: \_\_\_\_\_


CATALOG NUMBER: \_\_\_\_\_



### OMNI SLIM 3CCT SERIES QUICK SPECS

<b>INPUT VOLTAGE</b>	24V DC
<b>WATTAGE</b>	4W
<b>LUMENS</b>	Up to 280Lm
<b>CCT</b>	2700K / 3000K / 4000K Adjustable
<b>CRI</b>	90+
<b>IP RATING</b>	IP20
<b>DIMENSIONS</b>	3"W x 5/8"H
<b>BEAM ANGLE</b>	148°
<b>DIMMING</b>	5-100% (TRIAC/ELV/CL)
<b>OPERATING TEMP</b>	-10°C (14°F) to 45°C (113°F)
<b>CERTIFICATIONS</b>	cETLus Listed - dry locations
<b>RATED LIFE</b>	35,000 Hours

### OMNI SLIM 3CCT SERIES QUICK DIMENSIONS

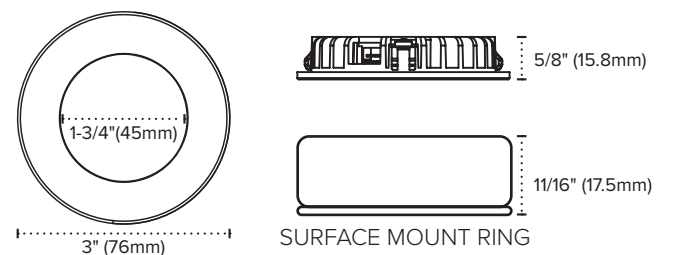

### OMNI SLIM 3CCT SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	FINISH	CCT	LUMENS	WATTAGE
OMNISL-3CCT	24V DC	White/Black	2700K/3000K/4000K	Up to 280Lm	4W

**Includes:** (1) Black Trim, (1) White Trim, (1) Black Surface Ring, (1) White Surface Ring, 72" lead wires

**RECOMMENDED POWER SUPPLIES**

Part Number	Description	Primary / Secondary	Total Wattage	Listing	Dimensions
<b>ADPT-DRJ-30-24</b>	Constant voltage hardwire driver	100-277 AC / 24V DC	30W	cULus	7.4"L x 3.6"W x 1.02"H
<b>ADPT-DRJ-60-24</b>	Constant voltage hardwire driver	100-277 AC / 24V DC	60W	cULus	7.4"L x 3.6"W x 1.02"H
<b>ADPT-DRJ-96-24</b>	Constant voltage hardwire driver	100-277 AC / 24V DC	96W	cULus	8.66"L x 3.6"W x 1.61"H
<b>ADPT-DRJ-192-24</b>	Constant voltage hardwire driver	100-277 AC / 24V DC	192W	cULus	10.94"L x 4.25"W x 1.8"H
<b>ADPT-DRJ-288-24</b>	Constant voltage hardwire driver	100-277 AC / 24V DC	288W	cULus	11.85"L x 4.25"W x 1.8"H

**ADDITIONAL INFORMATION**

Model	Cut-out Size (For Recessed Mounting)
<b>OMNISL-3CCT</b>	2.6" (66mm)



# AMERICAN LIGHTING WARRANTY

## LIMITED WARRANTY FOR LED PRODUCTS: 3 YEARS

### LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver, or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty.

### PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit [www.americanlighting.com](http://www.americanlighting.com). Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary. LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% more for a particular project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.

### AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point where 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.