R2FRAT-WD

2" FQ - Round Adjustable Trim (Dim-To-Warm)





1	D	D	^	11	\boldsymbol{c}	_	n	F۶	_	DI	IDI	ш	$\boldsymbol{\cap}$	N

The FQ Recessed series offers a complete line of high performance LED luminaires that provide outstanding functionality and quality. The series features superlative glare control with 30° shielding, 35° vertical tilting and 360° horizontal rotation, and uniform floor-to-ceiling wall washing. Multiple power level options and a full line of round and square, trimmed and trimless luminaires offer versatile solutions for various lighting applications. Easy to order, install, and service.

FEATURES

- · Two-piece die-cast construction
- · Light engine mounted on trim with springs for easy replacement
- 0-35° vertical tilting and 365° horizontal rotation
- Center beam alignment retained throughout adjustment range
- · Field changeable beam angle with reflectors provided
- · Accepts one Lens or glare control accessory
- 5 year WAC Lighting product warranty

Fixture Type:	
Catalog Number:	
Project:	
Location:	

SPECIFICATIONS

Construction: Durable die-cast aluminum construction

Input Universal 120-277V AC 50/60 Hz

Dimming: Electronic Low Voltage (ELV): 100%-1%

TRIAC: 100%-1% 0-10V: 100-1%

Light Source: High output 3-step Mac Adam Ellipse COB

Rated life of 50,000 hours at L70

Mounting: Heavy gauge retention clips support trim firmly.

Safety cabling standard. Ceiling cutout: Ø 3 1/2"

Accomodates 1/2 "- 1 " ceiling thickness

Finish: Electrostatically powder coated White, Black, Dark

Bronze. Enamel coated Haze.

Standards: ETL & cETL Damp Location Listed,

Title 24 JA8-2019 Compliant.

	Model	Beam	Lumens	CBCP	Color Temp	CRI	Finishes	Reflector/Trim
5" - 234" - 4" - 4" - 1	R2FRAT Round Trim	F 40° W 55°	855 845	1560 1155	WD 3000K-1800K	90	BK DB HZWT WT	Black Dark Bronze Haze/White White

R2FRAT-WD-


Example: R2FRAT-WD-BK (Beam F-40° reflector is pre-installed. Beam W-55° reflector is included.)

Please see next page for housing units (required)

R2FRAT-WD

2" FQ - Round Adjustable Trim (Dim-To-Warm)



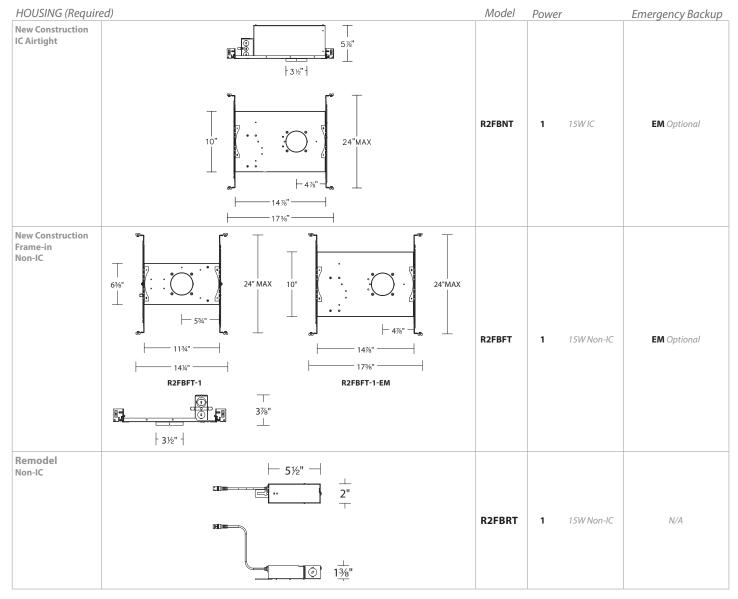

R2FB__-

Example: R2FBNT-1 or R2FBNT-1-EM (with Emergency backup battery)

GLARE CONTROL ACCESSORIES

LENS-11-HCM	Honeycomb Louver
LENS-11P-CRL-BK	Cross Louver

LENS ACCESSORIES

LENS-11	AMB	Amber
	RED	Red
	BLU	Blue
	GRN	Green
	SPR	Spread
	BEL	Beam Elongating

waclighting.com Phone (800) 526.2588 Fax (800) 526.2585 **Headquarters/Eastern Distribution Center** 44 Harbor Park Drive Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 **Western Distribution Center** 1750 Archibald Avenue Ontario, CA 91761