


OCULARC – model: 7013-CS

H/L/J Track Luminaire

WAC

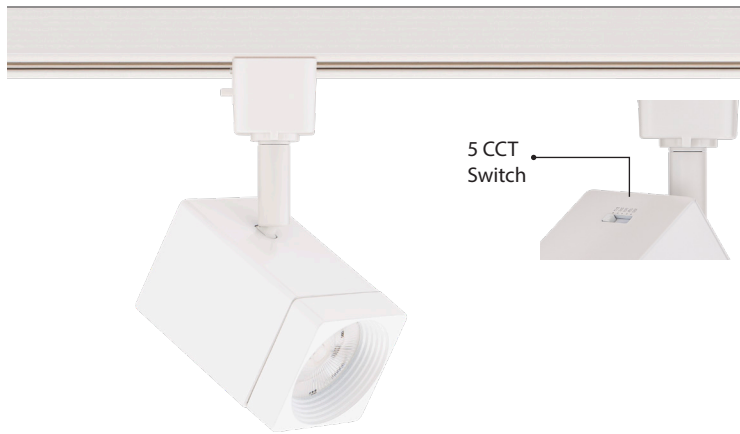


Fixture Type:

Catalog Number:

Project:

Location:



PRODUCT DESCRIPTION

Ideal for residential spaces and lower-mounted commercial installations, the OCULARC 7013-CS combines a high efficacy 5-CCT selectable COB LED with easy-to-use films for three separate beam spreads, along with an adjustable base to accommodate a variety of user preferences. With the driver and thermal/optical management encased in the die-cast housing, this compact luminaire offers a clean, efficient, versatile design that works with almost any décor. Available in H, J/J2, and L track configurations.

FEATURES

- **3 beam angle options included:**
 - 60° beam film pre-installed, interchangeable 30° film supplied, remove film for 17° spot beam
- Discrete, toolless integrated 5CCT switch: 2700K, 3000K, 3500K, 4000K, 5000K
- Integral driver and high output COB LED
- Outperforms halogen 65W MR16
- 350° horizontal and 90° vertical aiming
- 5 year warranty

REPLACEMENT OPTICS

| | |
|-----------------------|--------------------------|
| 17° Spot TIR Lens | TIR-HER2-OD45-S-W |
| 30° Narrow Flood Film | FILM-14-N |
| 60° Flood Film | FILM-14-F |

SPECIFICATIONS

- Construction:** Die-cast aluminum with baffled front cover for glare control
- Input Power:** 11W at 120VAC, 50/60Hz
- Power Factor:** 0.98
- THD(A):** < 15% Total Harmonic Distortion (Current)
- Light Source:** High output 3 Step Mac Adam, Ellipse COB, 90+ CRI
Rated Life of 50,000 hours at L70
- Dimming:** Electronic Low Voltage (ELV) or TRIAC: 100 - 10%
Reference dimming report for compatibility.
- Standards:** ETL & cETL Dry Location Listed, Title 24 JA8 Compliant
- Finish:** Electrostatically powder coated Black and White
- Operating Temperature:** -4°F to 104°F (-20°C to 40°C)

EXTENSION OPTIONS

Sold Separately. Ceiling Mount and H-Track compatible only

| | | | |
|-----------|----|-----|----------------------|
| H H Track | 18 | 18" | BK Black WT White |
| | 24 | 24" | |
| | 36 | 36" | |
| | 48 | 48" | |

| System | Model | Beam | Max Lumens | Max CBCP | Color Temp | CRI | T24 | Finish |
|--------------|-------------|------|------------|----------|---|-----|-----|----------------------|
| H H Track | 7013 | 17° | 1000 | 3200 | CS 2700K/3000K/3500K/4000K/5000K | 90 | Yes | BK Black WT White |
| L L Track | | 30° | 920 | 1365 | | | | |
| J J/J2 Track | | 60° | 890 | 640 | | | | |

__-7013-CS-__

Example: **H-7013-CS-BK**

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761