


OCULARC – model: 7030-CS

H/L/J Track Luminaire

WAC

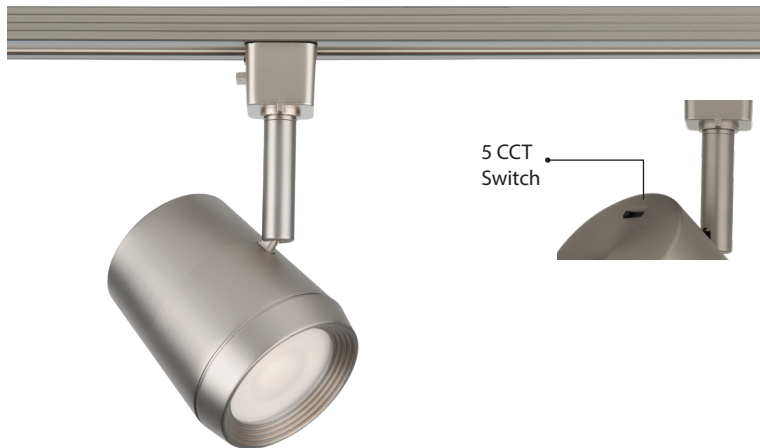


Fixture Type:

Catalog Number:

Project:

Location:



PRODUCT DESCRIPTION

Ideal for retail and higher-mounted residential installations, the OCULARC 7030-CS balances the output of a high output 5-CCT selectable COB LED, with the flexibility of easy-to-use films for three beam spreads, along with an adjustable base to accommodate a variety of user preferences. Accessory or glare control compatibility allows customization to project needs. Available in H, J/J2, and L track configurations.

FEATURES

• 3 beam angle options included:

- 55° beam film pre-installed, interchangeable 40° film supplied, remove film for 20° spot beam
- Discrete, toolless integrated 5CCT switch: 2700K, 3000K, 3500K, 4000K, 5000K
- Integral driver and high output COB LED
- Outperforms halogen 100W PAR38
- 350° horizontal and 90° vertical aiming
- Accommodates one lens OR one glare control accessory
- 5 year warranty

SPECIFICATIONS

- Construction:** Die-cast aluminum with baffled front cover for glare control
- Input Power:** 29W at 120VAC, 50/60Hz (PF: 0.98)
- THD(A):** < 15% Total Harmonic Distortion (Current)
- Light Source:** High output 3 Step Mac Adam, Ellipse COB, 90+ CRI
Rated Life of 50,000 hours at L70
- Dimming:** Electronic Low Voltage (ELV) or TRIAC: 100 - 10%
Reference dimming report for compatibility.
- Standards:** ETL & cETL Dry Location Listed,
Title 24 JA8 Compliant
- Finish:** Electrostatically powder coated Black, Dark Bronze, and White.
Electroplated Brushed Nickel
- Operating Temperature:** -4°F to 104°F (-20°C to 40°C)

REPLACEMENT OPTICS

40°	Narrow Flood Film	FILM-20-N
55°	Flood Film	FILM-20-F

System	Model	Beam	Max Lumens	Max CBCP	Color Temp	CRI	T24	Finish
H	H Track	20°	2255	9300	CS 2700K/3000K/3500K/4000K/5000K	90	Yes	BK Black
L	L Track	40°	2095	2830				BN Brushed Nickel
J	J/J2 Track	55°	2065	1875				DB Dark Bronze*
								WT White

* Only available in H Track

-7030-CS-

Example: H-7030-CS-BN

COLOR LENS

Amber	LENS-20-AMB
Blue	LENS-20-BLU
Green	LENS-20-GRN
Red	LENS-20-RED

FLAT LENS

Frosted	LENS-20-FR
Spread	LENS-20-SPR
Beam Elongating	LENS-20-BEL

GLARE CONTROL

Cross Louver - Black	LENS-20P-CRL-BK
Cross Louver - Brushed Nickel	LENS-20P-CRL-BN
Cross Louver - White	LENS-20P-CRL-WT
Snoot - Black	LENS-20-SNOOT-BK
Snoot - Brushed Nickel	LENS-20-SNOOT-BN
Snoot - White	LENS-20-SNOOT-WT
Honey Comb Louver	LENS-20-HCL

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761