

# WAC LIGHTING

## 120V 3-CCT Puck

### Light

#### Undercabinet Task Luminaire

Fixture Type: \_\_\_\_\_  
Catalog Number: \_\_\_\_\_  
Project: \_\_\_\_\_  
Location: \_\_\_\_\_

Model	Color Temp & CRI	Finish	Lumens
HR-AC70 120 VAC - 1 Single Wired Puck Light	2700K/3000K/3500K 90	BK Black BN Brushed Nickel WT White	290

Example: **HR-AC70-CS-WT**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### FEATURES


- 3-CCT Switchable between 2700K and 3500K
- Integrated LED
- Recessed or surface mounting
- Quick and easy installation
- Link up to 20 puck lights per run
- WT finish: Prevents microbial growth on the surface of the fixture
- ACLED driverless technology
- 5 year warranty

#### SPECIFICATIONS

Color Temp:	2700K/3000K/3500K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	50000 Hours
Standards:	ETL, cETL, Title 24 JA8 Compliant Damp Location Listed
Construction:	Die-cast aluminum with Acrylic Diffuser



#### FINISHES:

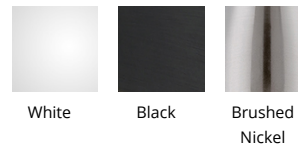

#### LINE DRAWING:

# WAC LIGHTING

## 120V 3-CCT Puck

### Light

#### Undercabinet Task Luminaire

Fixture Type: \_\_\_\_\_  
 Catalog Number: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Location: \_\_\_\_\_

Model	Color Temp & CRI	Finish	Lumens
HR-AC71 120 VAC - 1 Single Wired Puck Light w/ Cord	2700K/3000K/3500K 90	BK Black BN Brushed Nickel WT White	290

Example: **HR-AC71-CS-WT**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### FEATURES


- 3-CCT Switchable between 2700K and 3500K
- Integrated LED
- Recessed or surface mounting
- Quick and easy installation
- Link up to 20 puck lights per run
- WT finish: Prevents microbial growth on the surface of the fixture
- ACLED driverless technology
- 5 year warranty

#### SPECIFICATIONS


Color Temp:	2700K/3000K/3500K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	50000 Hours
Standards:	ETL, cETL, Title 24 JA8 Compliant Damp Location Listed
Construction:	Die-cast aluminum with Acrylic Diffuser



#### FINISHES:

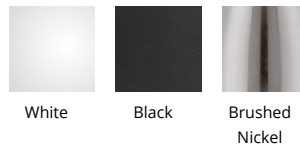

#### LINE DRAWING:

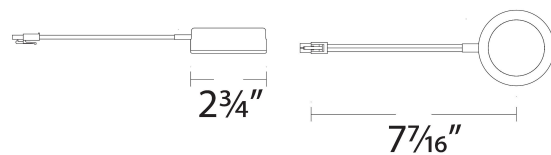

# WAC LIGHTING

## 120V 3-CCT Puck

### Light

#### Undercabinet Task Luminaire

Fixture Type: \_\_\_\_\_  
 Catalog Number: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Location: \_\_\_\_\_

Model	Color Temp & CRI	Finish	Lumens
HR-AC72 120 VAC - 1 Puck Lights w/ Double Wire	2700K/3000K/3500K 90	BK Black BN Brushed Nickel WT White	290

Example: **HR-AC72-CS-WT**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### FEATURES


- 3-CCT Switchable between 2700K and 3500K
- Integrated LED
- Recessed or surface mounting
- Quick and easy installation
- Link up to 20 puck lights per run
- WT finish: Prevents microbial growth on the surface of the fixture
- ACLED driverless technology
- 5 year warranty

#### SPECIFICATIONS

<b>Color Temp:</b>	2700K/3000K/3500K
<b>Input:</b>	120 VAC,50/60Hz
<b>CRI:</b>	90
<b>Dimming:</b>	ELV: 100-10%
<b>Rated Life:</b>	50000 Hours
<b>Standards:</b>	ETL, cETL, Title 24 JA8 Compliant Damp Location Listed
<b>Construction:</b>	Die-cast aluminum with Acrylic Diffuser




#### FINISHES:

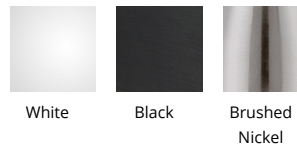

White Black Brushed Nickel

#### LINE DRAWING:



# WAC LIGHTING

## 120V 3-CCT Puck

### Light

#### Undercabinet Task Luminaire

Fixture Type: \_\_\_\_\_  
Catalog Number: \_\_\_\_\_  
Project: \_\_\_\_\_  
Location: \_\_\_\_\_

Model	Color Temp & CRI	Finish	Lumens
HR-AC73 120 VAC - Puck Light Kit- 2 Double Wire Lights, 1 Single Wire Lights, and Cord	2700K/3000K/3500K 90	BK Black BN Brushed Nickel WT White	290 X 3

Example: **HR-AC73-CS-WT**

For custom requests please contact [customs@wacighting.com](mailto:customs@wacighting.com)

#### FEATURES


- 3-CCT Switchable between 2700K and 3500K
- Integrated LED
- Recessed or surface mounting
- Quick and easy installation
- Link up to 20 puck lights per run
- WT finish: Prevents microbial growth on the surface of the fixture
- ACLED driverless technology
- 5 year warranty

#### SPECIFICATIONS

Color Temp:	2700K/3000K/3500K
Input:	120 VAC,50/60Hz
CRI:	90
Dimming:	ELV: 100-10%
Rated Life:	50000 Hours
Standards:	ETL, cETL,Title 24 JA8 Compliant Damp Location Listed
Construction:	Die-cast aluminum with Acrylic Diffuser



#### FINISHES:

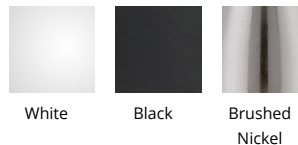

#### LINE DRAWING: