

# WAC LIGHTING

## 120V 3-CCT Barlight

### Undercabinet Task Luminaire

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_

Project: \_\_\_\_\_

Location: \_\_\_\_\_

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
BA-AC08 8"	CS 2700K/3000K/3500K - 90	6.5W	355	WT White
BA-AC18 18"	CS 2700K/3000K/3500K - 90	10.5W	600	
BA-AC24 24"	CS 2700K/3000K/3500K - 90	15W	910	
BA-AC30 30"	CS 2700K/3000K/3500K - 90	17.5W	1075	

Example: **BA-AC08-CS-WT**

#### FEATURES

- 3-CCT Switchable between 2700K and 3500K
- Does not require any driver or transformer
- Backlighting with parabolic reflector allows a high uniformity of light
- Minimal space between diffusers for a visually seamless line of illumination
- True 1" profile
- Prevents microbial growth on the surface of the fixture
- ACLED driverless technology
- 5 year warranty

#### SPECIFICATIONS

Construction:	Extruded aluminum with Acrylic Diffuser
Power:	6.5W, 10.5W, 15W, 17.5W
Input:	120 VAC, 50/60Hz
Dimming:	ELV: 100-10%
Light Source:	Integrated LED 3 Step Mac Adam Ellipse
Lens:	Acrylic Lens
Rated Life:	50000 Hours
Finish:	Electrostatically Powder Coated: White
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Damp Location Listed, Title 24 JA8 Compliant




#### FINISHES:



White

#### LINE DRAWING:

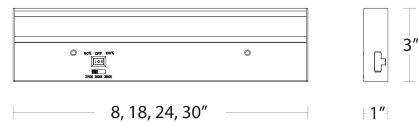

# WAC LIGHTING

## 120V 3-CCT Barlight Undercabinet Task Luminaire

Fixture Type: \_\_\_\_\_

Catalog Number: \_\_\_\_\_




Project: \_\_\_\_\_

Location: \_\_\_\_\_

---

### ACCESSORIES

---

	<i>Model</i>	<i>Description</i>	<i>Finish</i>
	<b>BA-I-WT</b>	"I" Connector BA-I	White
	<b>BA-IC12-WT</b> <b>BA-IC24-WT</b> <b>BA-IC36-WT</b>	Interconnect Cable BA-IC Interconnect Cable BA-IC Interconnect Cable BA-IC	White White White
	<b>BA-PC6-WT</b>	Power Cord	White