

BKRD SERIES Outdoor Lighting

BKRF-15W-MCTP-BR-P

BKRF-15W-MCTP-BK-P

ROUND BULKHEADS, POWER & CCT SELECTABLE, WITH PHOTOCELL

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

WESTGATE


THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____



Type: _____

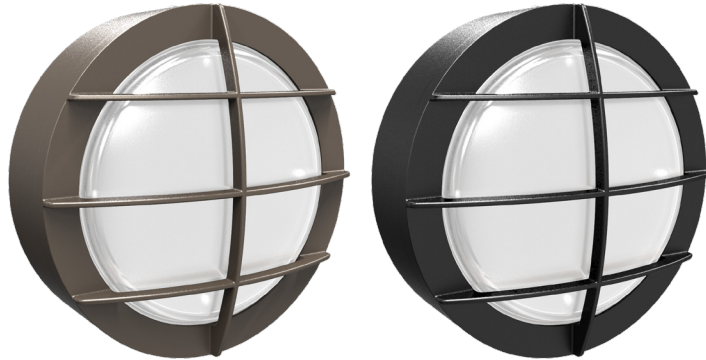

Selection:



ROUND BULKHEADS are versatile, power and CCT selectable fixtures with a built-in photocell for enhanced energy efficiency and adaptive lighting.

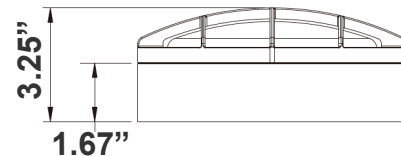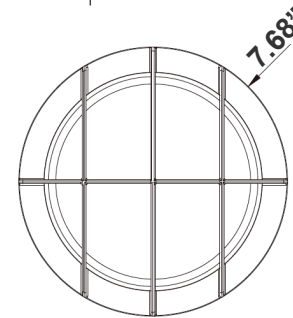

3.25"(H) x 7.68"(W) x 1.67"(D)

Features

- Back plate: Die-cast aluminum
- Multi Color Temperature & Multi Power/Wattage (Selectable)
- Waterproof-Sealed Glass Lens
- 7-Year Warranty

Technical Specifications

Electrical:

- Voltage: 120-277V AC 60Hz
- Wattage: 9W/12W/15W
- Power Factor: >0.90
- Efficacy: 85LM/W

Mechanical:

- Back plate: Die-cast aluminum
- Waterproof-Sealed Glass Lens
- Integrated DC Photocell Under The Lens with ON/OFF Switch
- Non-Cutoff Optics Ideal for Maximum Light Distribution
- Operating Temperature: -4°F to +113°F
- 7-Year Warranty
- IP65, Suitable

Lighting:

- Dimming: 0-10V Dimming
- Multi Color Temperature & Multi Power/Wattage (Selectable)
- LED Type/Brand: 2835LUMILEDS
- Front: Polycarbonate Lens and Housing
- Total Lumens: 1275LM
- Color Temperatures: 3000K/4000K/5000K
- Color Rendering Index: CRI ≥ 70
- Beam Angle: 100°
- Rated life: 70,000 Hrs

Applications:

- Entrance lighting, courtyard lighting;
- Industrial lighting, Outdoor landscape lighting;
- Building, The hotel;
- Wall lighting area and so on




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com




WG-20250128

Photometrics: BKRF-15W-MCTP-P

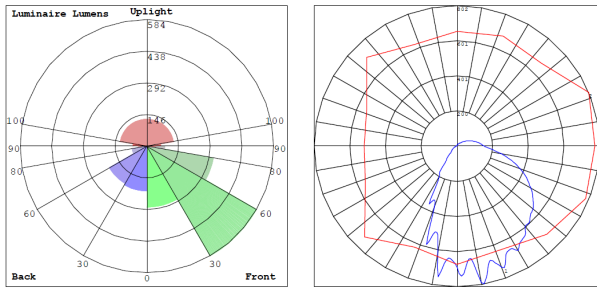

BUD Rating: B1-U3-G1

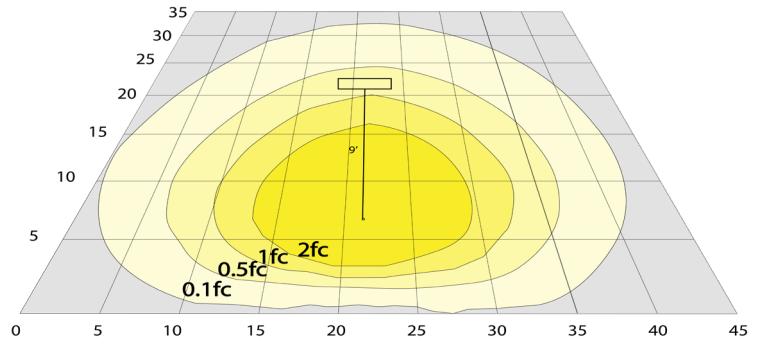

30W 5000K, Area 35'x 45' Mounting Height: 9'

Other Views: BKRD-15W-MCTP-P

Bronze:



Side View



Back View

Black:



Side View



Back View

Performance Table: BKRF-15W-MCTP-P

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
BKRF-15W-MCTP-BR-P BKRF-15W-MCTP-BK-P	9W 12W 15W	120-277V	765LM 1020LM 1275LM	3000K 4000K 5000K	B1-U3-G1	85

Sample Ordering

Model **Watt** **Color Temp.** **Housing** **Sensor**
 BKRF - 15W - MCTP - - P
BR = Bronze
BK = Black

